





Please consult the manufacturer's installation manual for all details and requirements before making a final design layout decision.

INCEPTION 36"

Traditional Electric Fireplace
Pre-Drywall Installation

FRAMING DIMENSIONS


MODEL	UNIT	W1	H1	D1	W2	D2	D3
SF-INC36, SF-INC36-B/C	in.	42	34-7/8	8-3/4	59	41-5/8	30-5/16
	mm	1067	886	222	1499	1057	770

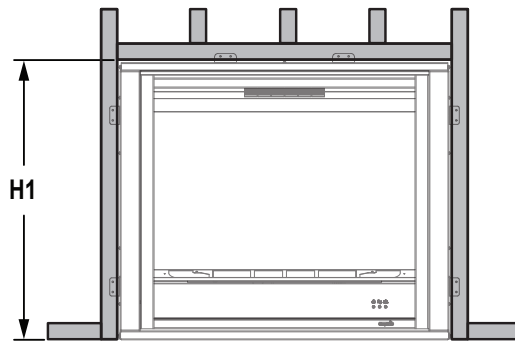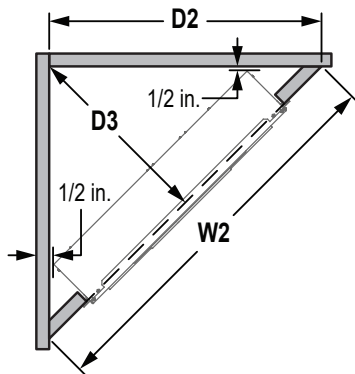


NOTE: Adjust framing dimensions for interior chase sheathing (such as drywall), if needed.

MINIMUM CLEARANCES TO COMBUSTIBLES

AREA	CLEARANCES
TOP	0 in.
BOTTOM	0 in.
SIDES	0 in.
BACK	0 in.

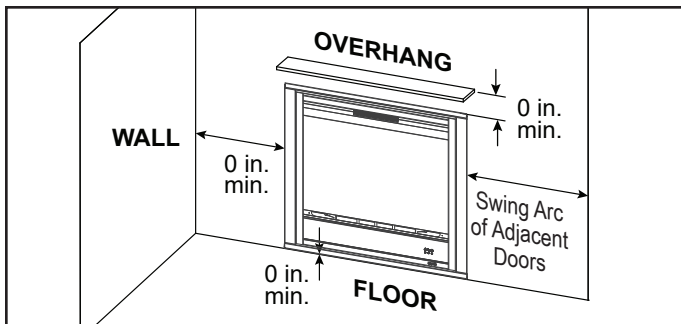

AREA	CLEARANCES
FRONT	36 in. [914 mm]
OVERHANG (0-6 in.)	0 in.
OVERHANG (Up to 24 in.)	2 in. [51 mm]

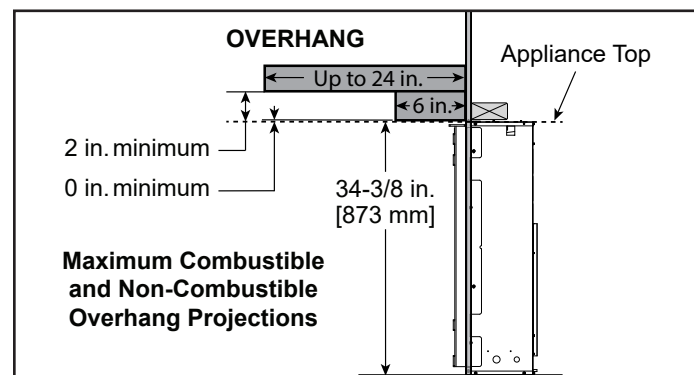

ELECTRICAL CONNECTION REQUIREMENTS

CIRCUIT	CONNECTION METHOD	BTUS
15 AMP, 120V/60 Hz/1500W	Hardwire only	5,000
20 AMP, 240V/60 Hz/3000W	Hardwire only	10,000

Specifications

SF-INC36, SF-INC36-B, SF-INC36-C

Product information provided is not complete and is subject to change without notice.
Product installation must adhere strictly to instructions accompanying product to
avoid risk of fire and potential injury.

INCEPTION 36"

APPLIANCE CERTIFICATION

MODEL: SF-INC36, SF-INC36-B, SF-INC36-C | LABORATORY: Intertek | STANDARD: CSA C22.2 No. 46-13; UL 2021 (4th Edition)
TYPE: Electric Air-Heaters; Fixed and Location-Dedicated Electric Room Heaters

PRODUCT DIMENSIONS

MODEL	UNIT	SHELL SIZE						VIEWING AREA	
		D1	D2	H1	H2	W1	W2	W3	H3
SF-INC36, SF-INC36-B/C	in.	8-7/8	8-3/4	35-3/4	34-3/8	43-3/4	41-1/4	34-1/2	19-3/4
	mm	225	222	908	874	1111	1048	876	502

