



Experience Better Living.



Vapor
Series

Optimyst® Revive
Simply transform your space.



Optimyst® Revive Water Vapor Fireplace

Experience Better Living.



Key Benefits

Flame Realism

Produces ultra realistic 3D flames using using water vapor, courtesy of the Optimyst flame effect.

Adaptable Design

Versatile design suits modern or traditional settings, with a pull-out drawer for easy water refills, enabling installation anywhere.

Silent and Adjustable Ambience

Experience silent, fully variable flames for diverse moods with option to enjoy the ambience without the heat.



Optimyst Flame Effect

Generates the most lifelike flames through revolutionary water vapor technology.



Pull-out Drawer

Features a game-changing pull-out drawer for effortless water refills, no plumbing necessary.



Powerful Heating

Powerful fan-forced heater provides optional, on-demand heat for up to 1,000 sq ft.



Realistic Logs

Realistic charred log set to maximize the illusion of depth and the appearance of burning firewood.



Revive Your Hearth

Transform your unused fireplace with this sleek insert that fits perfectly into your existing hearth, offering a realistic 3D flame effect and cozy warmth.



Remote Control

Control the fireplace directly from the palm of your hand with the included remote control.

Featuring **Optimyst®** technology.

The world's most realistic 3D electric flame effect, patented by Dimplex. This unique flame effect is generated by an innovative combination of water vapor and light.



Scan for more information on dimensions, accessories, and technical details.





Volts: 120 V (3-Wire)
Watts: 1250 W
Amps: 10.42 A

Order Number	Model Number	Description
500003863	ABN15-RGB-AM	25" Vapor Fireplace

Flames may not be exactly as shown. Optimyst flames are dependent on installation environment.

© Dimplex All rights reserved. Material contained in this publication may not be reproduced in whole or in part, without prior permission in writing of Dimplex. Dimplex is a Registered Trade Mark in North America. All Dimplex flame effects are protected by multiple worldwide patents. All the products shown in this sell sheet are protected by intellectual property rights owned by Dimplex or members of the Glen Dimplex Group on an international basis. The Glen Dimplex Group of Companies will actively protect these rights. Specifications, finishes and dimensions are subject to change. Limited warranty. SE-696-R02-100324

Product Dimensions:

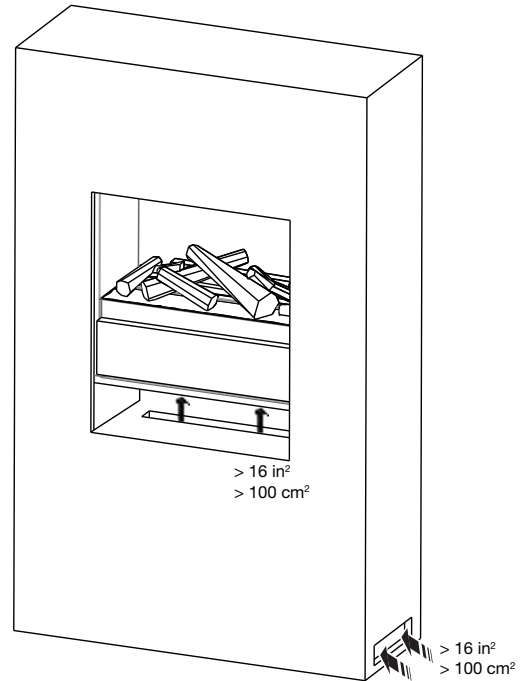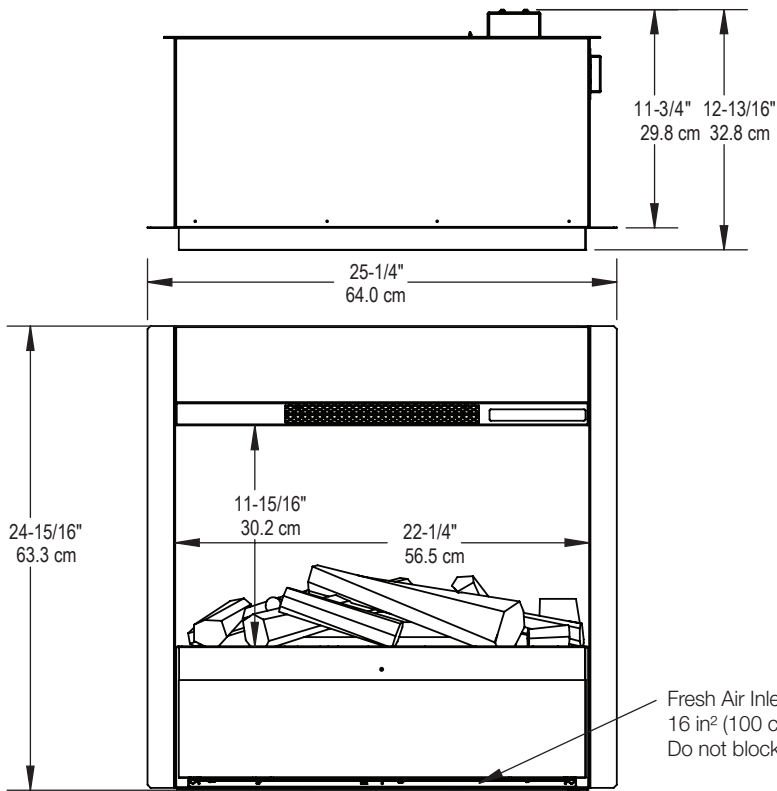

Fresh Air Inlet Provides
16 in² (100 cm²) of area.
Do not block!

Product	A WIDTH (in/cm)	B HEIGHT (in/cm)	C DEPTH (in/cm)	VIEWING DIMENSION - WxH (in/cm)
ABN15-RGB-AM	25-1/4 (64.0)	24-15/16 (63.3)	12-13/16 (32.8)	22-1/4 x 11-15/16 (56.5 x 30.2)

Installation Opening

(existing hearth or framed construction)

Based on the product dimensions frame an opening or determine if product will fit in existing hearth.


Refer to the minimum opening dimensions below.

Suitable clearance should be provided to allow air flow from the back and under the unit.

Opening Dimensions

Model	A (minimum width)	B Height	C (minimum depth)
ABN15-RGB-AM	25 1/4" / 64.1 cm	25" / 63.5 cm	12" / 30.5 cm

* Allows for a 2 mm clearance all around

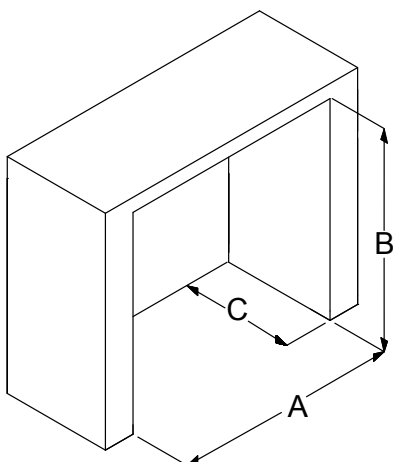

Additional Fresh Air Inlets for Framed structure.

CAUTION: Failure to include fresh air inlets will result in poor flame performance and damage to the fireplace. Fresh air inlets are required under the unit. If the air inlet is concealed using a grille, the covered area must be compensated for by having a larger opening.

The lower air inlet must allow for the air path to reach the underside of the unit. The opening must be a minimum of 16 in² (100 cm²).

Air inlet area required

16 in ²	100 cm ²
--------------------	---------------------